


## ZX10-EX FULLY RUGGED TABLET



- ATEX & IECEx Zone 2/22 explosive atmosphere certified
- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended<sup>1</sup>



ZX10-EX 3D demo

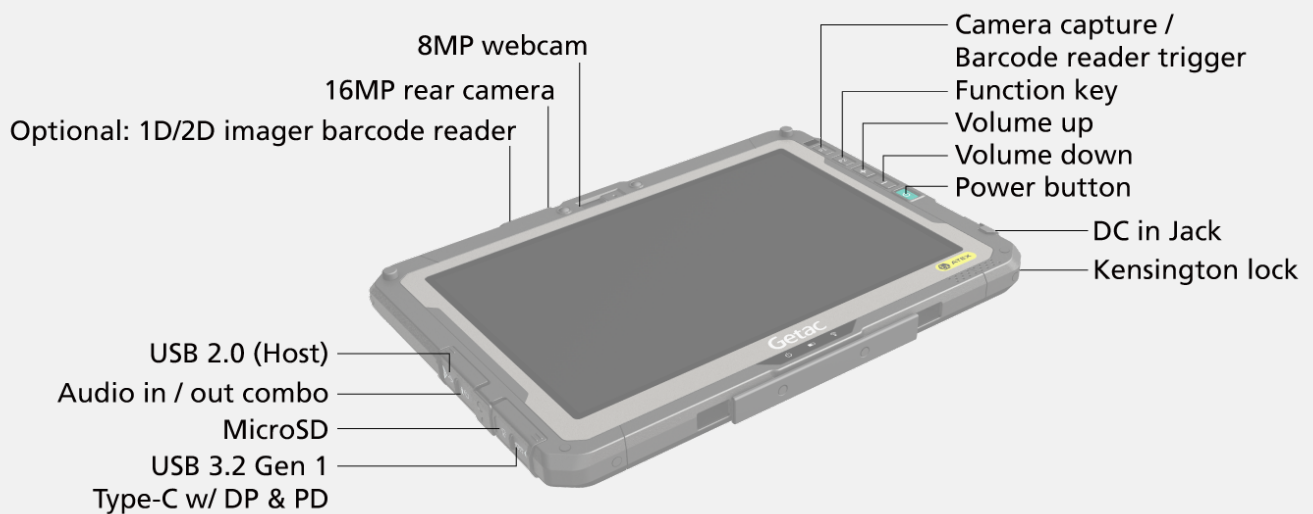

SPECIFICATIONS

Operating System

Android™ 13.0<sup>i</sup>

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core  
1.95GHz Max. 2.2GHz

Graphics

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)  
800 nits LumiBond display with Getac sunlight readable technology

Storage & Memory

4GB LPDDR4, 64GB eMMC  
Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button  
4 tablet programmable buttons

Pointing Device

Touchscreen  
- Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader<sup>ii</sup>

I/O Interface

8MP webcam x 1  
16MP auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 2.0 (Host) x 1  
USB 3.2 Gen 1 Type-C w/ DP & PD x 1  
MicroSD x 1  
Optional: SIM card slot x 2 (Micro-SIM, 3FF)<sup>viii</sup>

Communication Interface

Wi-Fi 802.11 a/b/g/n/ac  
Bluetooth (v5.0)<sup>iii</sup>  
Dedicated GPS  
Optional: 4G LTE mobile broadband<sup>vii</sup>  
Optional: Dual Micro SIM<sup>vi</sup>

Security Feature

Kensington lock  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader<sup>ii</sup>

Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery(3.84V,typical 4990mAh;  
min. 4870mAh)x 2  
Optional: High capacity Li-ion battery (3.84V,  
typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")  
1.04kg (2.40lbs)<sup>iv</sup>

Rugged Feature

MIL-STD-810H certified  
IP66 certified  
Vibration & 6 feet (1.8m) drop resistant  
ATEX & IECEx certified

Environmental Specification

Temperature °:  
- Operating: -21°C to 55°C / -5.8°F to 131°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22  
Ex II 3G Ex ic op is IIC T4 Gc  
Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Camera  
Getac Input Method  
Getac Driving Safety Utility (trial version)  
Getac settings and Google applications (Search, Chrome,  
Gmail, Maps, YouTube, Play, Drive, YouTube music,  
Google TV, Meet and photos)  
Getac Diagnostic  
Getac Monitoring (trial version) agent/SDK  
Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility  
Getac Monitoring  
Getac Management  
Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh;  
min. 4870mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Digitizer pen

Optional:

Carry bag  
Battery (3.84V, typical 4990mAh;  
min. 4870mAh)  
High capacity Li-ion battery (3.84V,  
typical 9980mAh; min. 9470mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Digitizer pen with tether  
Anti-static protection film  
Hard handle<sup>vi</sup>  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Rotating hand strap with kickstand  
100W Type-C AC adapter

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.  
That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee.  
That means you can depend on us to have your unit back in service within days

Standard

3 years Bumper-to-Bumper

ZX10-EX FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- V. Tested by an independent third-party test lab following MIL-STD-810H.
- VI. Factory option. Not user-swappable.
- VII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VIII. Units with 4G option come with an embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,  
Nangang Rd., Nangang Dist., Taipei City,  
115018, Taiwan, R.O.C. Tel : +886 2 2785  
7888 globalmarketing@getac.com |  
www.getac.com

Copyright © 2023 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only,available specification shall be subjected to  
quotation by request.