



MC 92NO^{ex}-G
with 1D-Long Range Scan Engine
or 1D-/2D Imager Engine

Features

- International approvals for global usability
- Barcode capture up to 12 m
- WLAN radio standard IEEE 802.11 a/b/g/n
- Easy battery changing in the Ex area
- Expanded storage capacity with replaceable SD card
- Various versions of replaceable keyboards
- Compatibility with MC92NO from Motorola
- Service contracts

Description

The MC 92NO^{ex}-G Mobile Computer with its pistol grip is a robust device for reliable barcode scanning in hazardous (potentially explosive) areas.

The scan trigger is conveniently positioned at the pistol grip. Thus barcodes can be captured with only one hand. The integrated radio module enables real time data access to your host system.

The MC 92NO^{ex}-G combines the strength of Microsoft's Pocket PC platform with the power of the TI OMAP 4430 dual-core[®] processor with 1 GHz.

A further highlight is the large easy-to-read 3,7" VGA colour display with touchscreen technology. The MC 92NO^{ex}-G is working with the IEEE 802.11a/b/g/n radio standard.

Market	Applications	Users
Automobile industry suppliers of paintwork, for paint shops, etc.	Material flow monitoring Production control Supplier chain management	Dispatch, receiving and stock management departments Personnel who have been instructed on the handling of potentially explosive substances
Food and beverages suppliers of aromatic substances, etc.	Incoming/outgoing goods, inventory management	Maintenance and repair Personnel who have been instructed on work in potentially explosive substances.
Petrochemicals from production through further processing to delivery	Safety tests Spare parts tracking Maintenance/repair work	Production area Personnel who have been instructed on the handling of potentially explosive substances.
Pharmaceuticals suppliers of the individual components required for the production of e. g. medication	Workshop communication Conformity verification Task allocation	

Explosion protection

Ex protection type

ATEX Ex II 2G Ex q [ib] IIC T4 Gb

Certification

PTB 13 ATEX 2019 X

IECEx Ex q [ib] IIC T4 Gb

Certification

IECEx PTB13.0043X

Other variants are available for:

- Brazil, Japan, Canada, Russia, South Africa and USA
- Mining EU

Technical data

Keyboard version

- 28 keys, numeric
- 43 keys, numeric with (F) function keys
- 53 keys, alphanumeric

Display

3.7" VGA colour display with touchscreen 480 x 640 pixels

Barcode options

SE 1524: 1D-Long Range Scan Engine
Reading range: up to 12 m

SE 4500-SR: 1D/2D Imager Engine
Reading range: up to 60 cm

Other variants available, see user's manual.

Dimensions (height x width x depth)

231 mm x 91 mm x 193 mm
9.1 inch x 3.6 inch x 7.6 inch

Weight

approx. 1060 g
approx. 34 oz

Ambient temperature

-20 °C to +40 °C
-4 °F to +104 °F

Storage temperature

-40 °C to +70 °C
-40 °F to +158 °F

Charging temperature

0 °C to +40 °C
+32 °F to +104 °F

Humidity

5 % to 95 % (non-condensing)

Protection class (EN 60529)

IP 54

Processor

TI OMAP 4430 dual-core[®] processor/1 GHz

Memory

1 GB/2 GB flash RAM/ROM with the option of expansion with SD card: up to 32 GB

Operating system

Windows Embedded Handheld 6.5.3 or Windows CE 7.0

Power supply

Li-ion battery 17-A1Z0-0001 with 7.4 V/2200 mAh

Battery can be changed in the Ex area!



Backup battery

Ni-MH battery (rechargeable)
2.4 V/15 mAh

Interfaces

- RS232
- USB

Application development

EMDK available from Motorola Solutions
Homepage

Audio System

Integrated microphone and loudspeaker

Voice support

Voice over IP

Wireless data communication (WLAN)

Radio standard

IEEE 802.11a/b/g/n

Data rate/frequency range

- IEEE802.11a: up to 54 Mbit/s - 5 GHz
- IEEE802.11b: up to 11 Mbit/s - 2.4 GHz
- IEEE802.11g: up to 54 Mbit/s - 2.4 GHz
- IEEE802.11n: up to 600 Mbit/s - 2.4/5 GHz

Output power

100 mW

Antenna

Integrated in the device

Note

The respective radio frequencies and usable channels depend on the country-specific regulations.

Bluetooth (WPAN)

Bluetooth version 2.1 with EDR
(including manager)


Max. data rate

2.1 Mbit/s

Antenna

Integrated in the device

Connection possibility

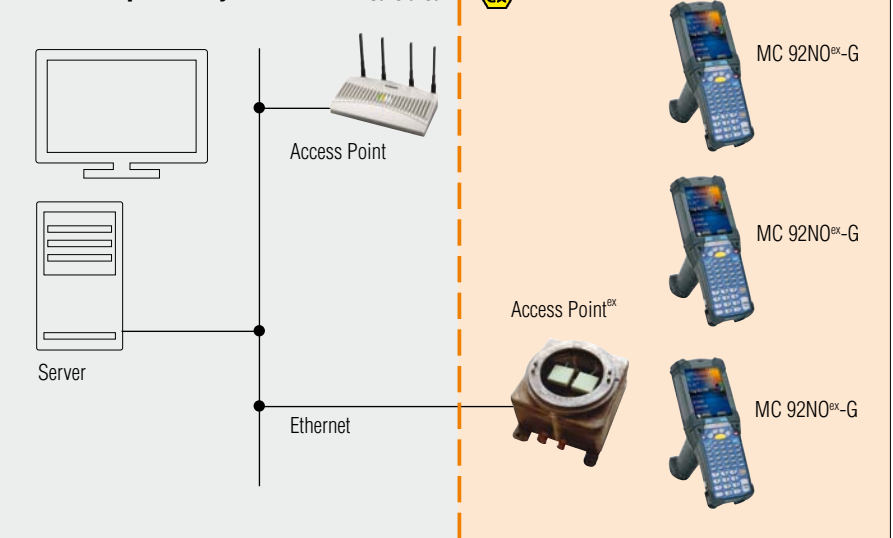

The MC 92NO^{ex}-G Mobile Computer with the 1D-Long Range Scan Engine or the 1D-/2D Imager Engine recognises the following barcodes:

1D-Codes:

Code 11	Interleaved 2 of 5
Code 39	MSI
Code 93	UPCA
Code 128	UPCE
Codabar	UPC/EAN supplementals
Coupon Code	Trioptic 39
Chinese 2 of 5	RSS-14
Discrete 2 of 5	RSS Expanded
EAN-8	RSS Limited
EAN-13	Webcode

2D-Codes: (only with 1D-/2D-Imager Engine)

Aztec	(Macro) Micro PDF-417
Australian 4-state	Micro PDF-417 PDF-417
Canadian 4-state	microQR
Composite AB	Maxi Code
Composite C	QR Code
PDF-417	TLC39
Data Matrix	UK 4-state
Dutch Kix	US Planet
Japanese 4-state	US Postnet
Macro PDF-417	USPS 4-state (US4CB)

Selection chart

Barcode options	Code no.	Version	Code no.	Operating system	Code no.
SE 1524 1D-Long Range Scan Engine	J	28 keys, numeric	A	Windows Embedded Handheld 6.5.3	Q
		43 keys, numeric with (F) function keys	F		
		53 keys, alphanumeric	E		
SE 4500-SR 1D-/2D Imager Engine	3	53 keys, alphanumeric with layout for VT emulation	G	Windows CE 7.0	Y
		53 keys, alphanumeric with layout for 3270 emulation	H		
		53 keys, alphanumeric with layout for 5250 emulation	J		

➔ **Complete order no. 17-A1A3-0G** **O/SY** **A600**

MC 92NO^{ex}-G including Li-ion battery (1 piece)

Please insert correct code. Technical data subject to change without notice. Note: All variants without accessories. You will find the accessories with order details on the accessories pages.